

Quality. Reliability. Accuracy.

# In-Floor Scale

### **Model SRV720 Series**

This in-floor scale is designed to blend into the exhibit floor, allowing ease of weight gathering on many types and sizes of animals while providing years of reliable service

The scale's durable stainless frame is coated with an aggregate infused polyurea coating that provides a slip-free surface for animals, reducing the fear animals often associate with a scale.

The scale incorporates hermetically sealed load cells and remote display allowing for complete wash down of the scale.

#### **REMOTE DISPLAY**

The readout is placed within a sealed NEMA 4x enclosure with a latching acrylic door.

#### **TOUCHLESS REMOTE OPERATION**

The scale will automatically turn on and lock the highest stable weight.

#### LARGE WEIGHING SURFACE

The scale's large 36" x 54" (SRV720-5) and 48" x 48" (SRV720-2) anti-skid surface make it ideal for gathering weight on a variety of large or small animals.

#### CAPACITY

2,000 Lbs or 907 Kgs

#### **POWER**

Continuous AC power provides maintence free operation.



# Mobile Platform Scale

### **Model SRV720 Series**



Quality. Reliability. Accuracy.




## SYSTEM SPECIFICATIONS

SPECIFICATIONS			
MAX WEIGHT	2000 Lb / 907 Kg		
DISPLAY TYPE	16 Character LCD w/ LED Backlight		
DISPLAY RESOLUTION	0.2 Lb / .1 Kg		
ACCURACY	0.1% +/- 1 digit of displayed resolution		
DISPLAY UNITS	Pounds / Kilograms		
POWER	120VAC 50-60 Hz		
AUTO ZERO	Scale will zero track.		
AUTO WEIGH	The scale will automatically turn on and lock in a stable weight.		
MEMORY	Last stable weight is automatically stored in memory. Press "RECALL" to retrieve.		
WARRANTY	2 years		

NOTE: Professional installation is required. Please consult with an SR Scales Representative or call our factory for details prior to purchase.

ACCESSORIES AND OPTIONS	
DESCRIPTION	PART NUMBER
36" X 54" PLATFORM	SRV720-5
48" X 48" PLATFORM	SRV720-2

	Dimensions					
Model #	"A"	"B"	"C"	"D"	"E"	
SRV720-2	48"	48"	52-1/2"	52-1/2"	3-1/4"	
SRV720-5	36"	54"	40-1/2"	58-1/2"	3-1/4"	

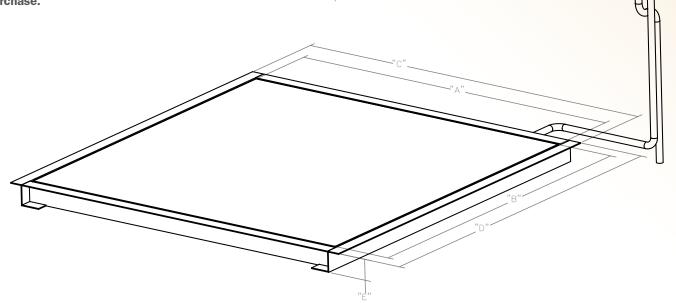

Specifications subject to change without notice.